


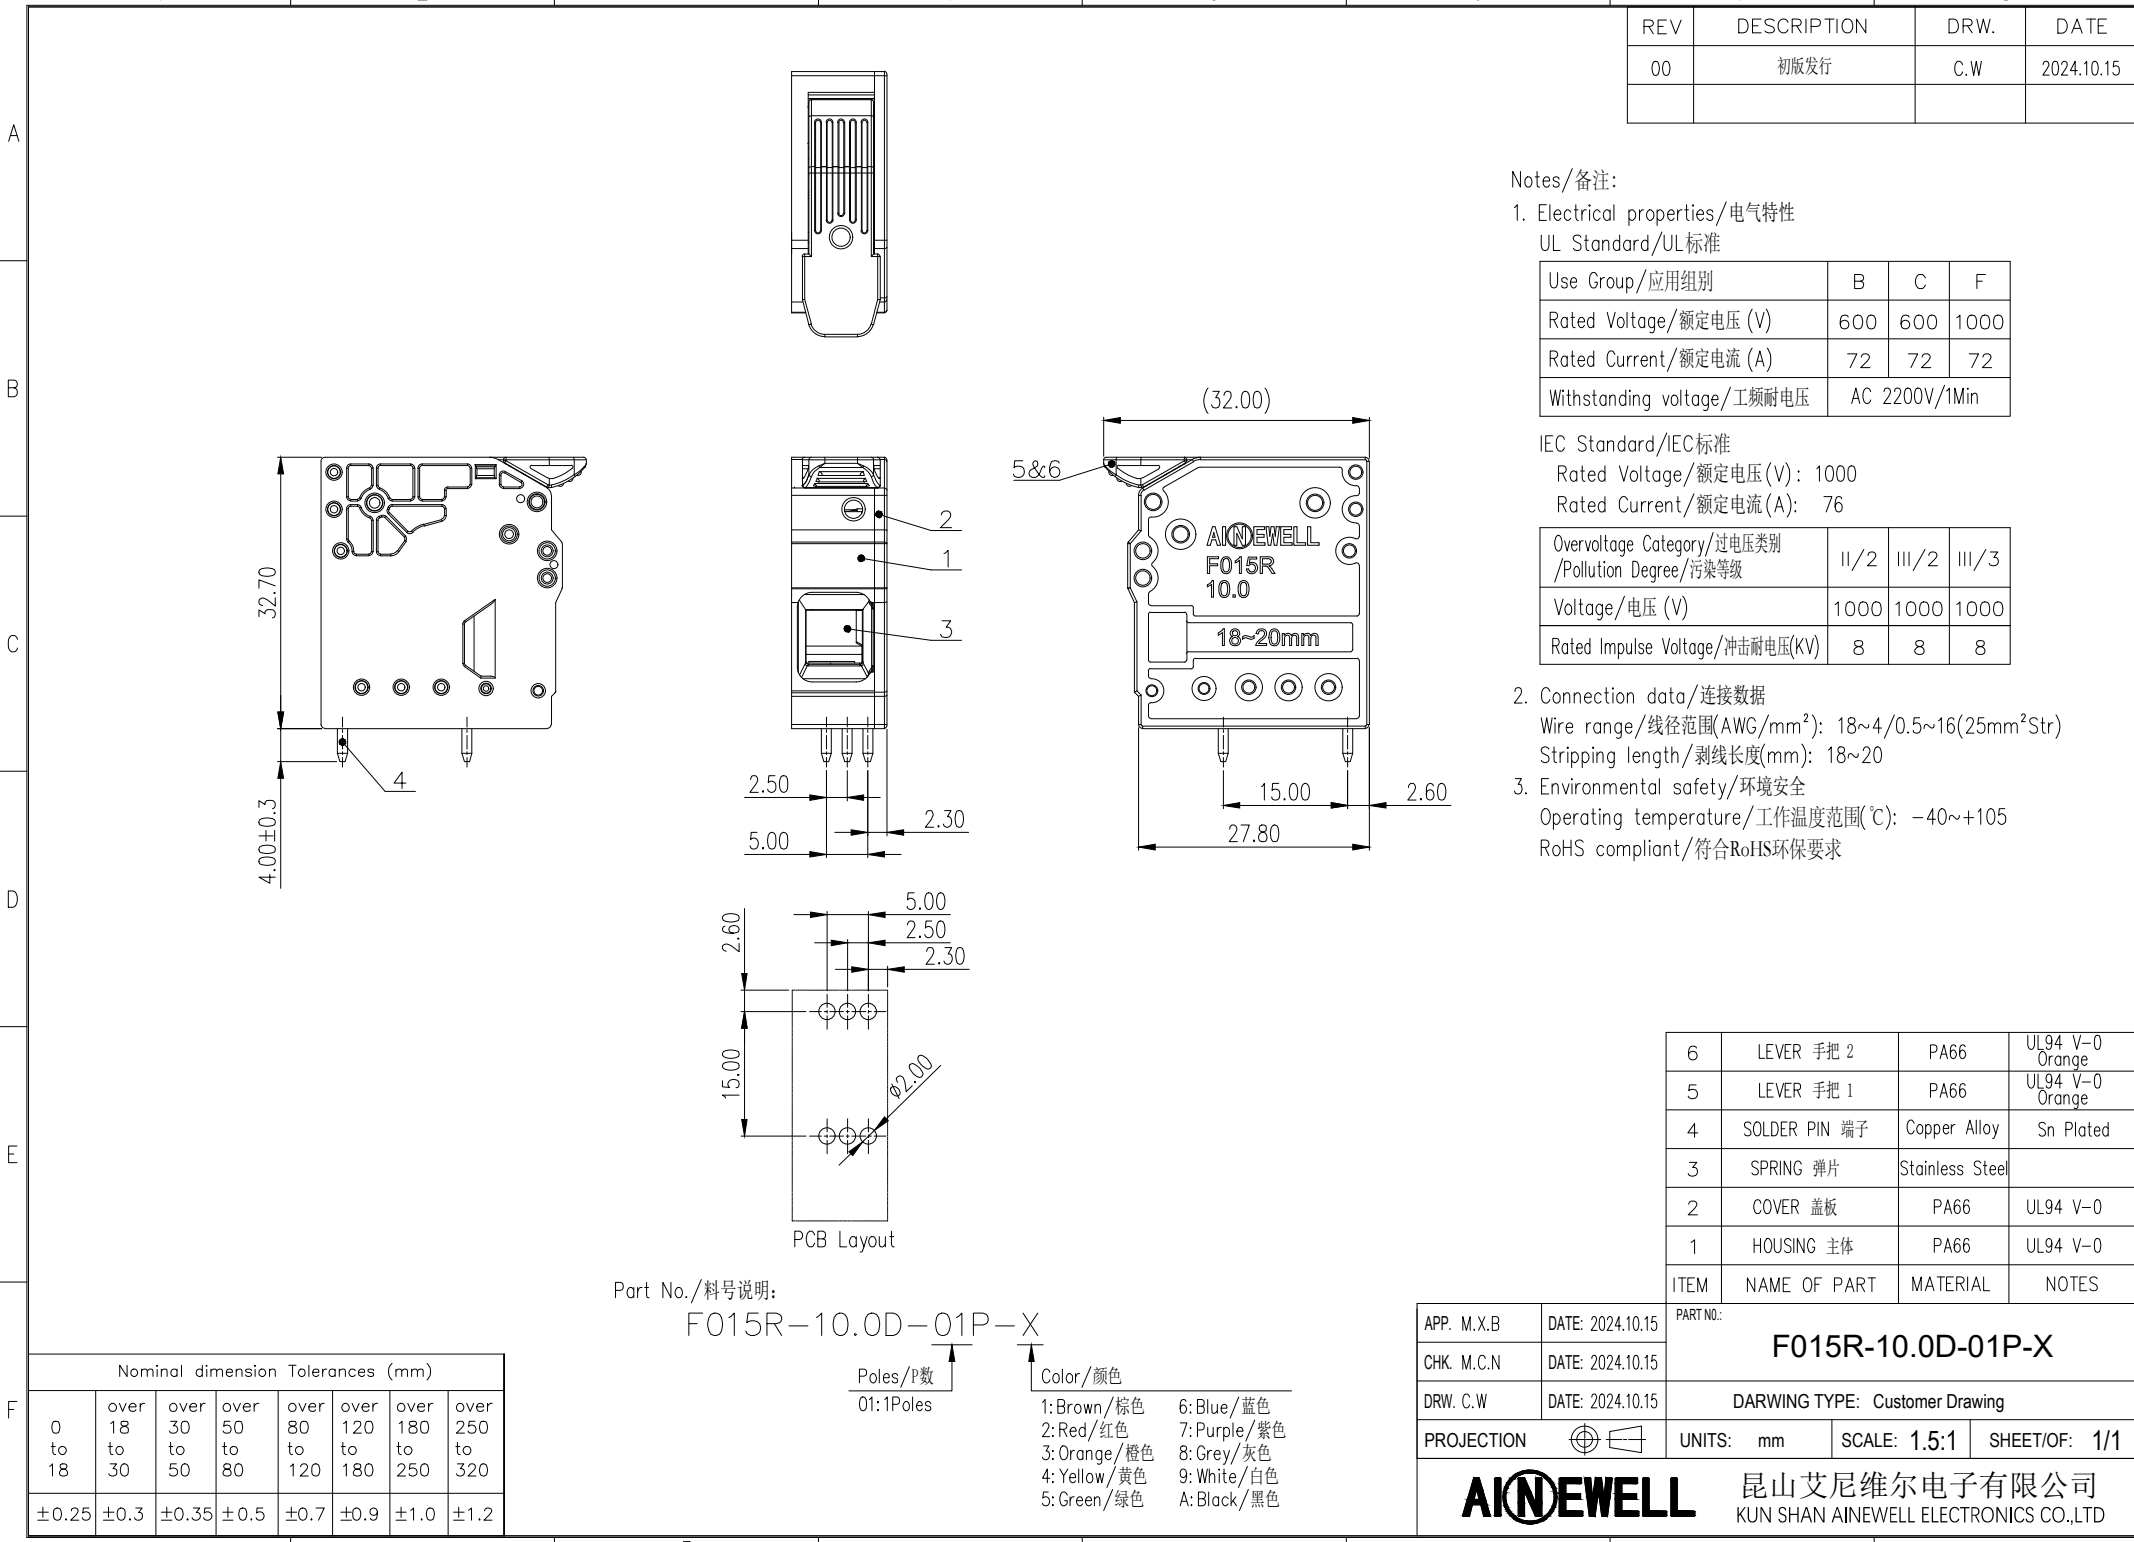

REV	DESCRIPTION	DRW.	DATE
00	初版发行	C.W	2024.10.15

Notes/备注:

1. Electrical properties/电气特性
UL Standard/UL 标准

Use Group/应用组别	B	C	F
Rated Voltage/额定电压 (V)	600	600	1000
Rated Current/额定电流 (A)	72	72	72
Withstanding voltage/工频耐压	AC 2200V/1Min		

IEC Standard/IEC 标准

Rated Voltage/额定电压 (V): 1000
Rated Current/额定电流 (A): 76

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	1000	1000	1000
Rated Impulse Voltage/冲击耐压(KV)	8	8	8

2. Connection data/连接数据
Wire range/线径范围(AWG/mm²): 18~4/0.5~16(25mm²Str)
Stripping length/剥线长度(mm): 18~20
3. Environmental safety/环境安全
Operating temperature/工作温度范围(°C): -40~+105
RoHS compliant/符合RoHS环保要求

6	LEVER 手把 2	PA66	UL94 V-0 Orange
5	LEVER 手把 1	PA66	UL94 V-0 Orange
4	SOLDER PIN 端子	Copper Alloy	Sn Plated
3	SPRING 弹片	Stainless Steel	
2	COVER 盖板	PA66	UL94 V-0
1	HOUSING 主体	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

APP. M.X.B	DATE: 2024.10.15	PART NO.: F015R-10.0D-01P-X	
CHK. M.C.N	DATE: 2024.10.15	DARWING TYPE: Customer Drawing	
DRW. C.W	DATE: 2024.10.15	UNITS: mm SCALE: 1.5:1 SHEET/OF: 1/1	
PROJECTION		UNITS: mm SCALE: 1.5:1 SHEET/OF: 1/1	
AINEWELL		昆山艾尼维尔电子有限公司 KUN SHAN AINEWELL ELECTRONICS CO.,LTD	